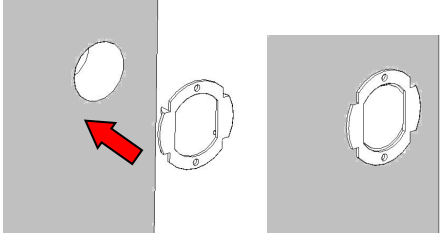

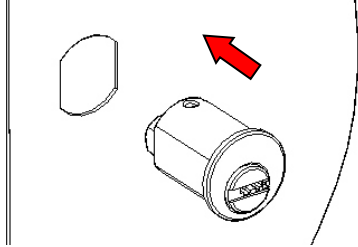
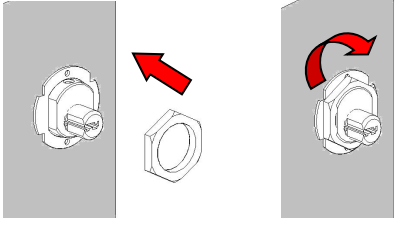
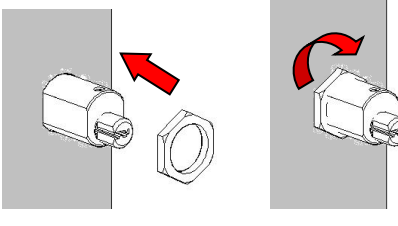
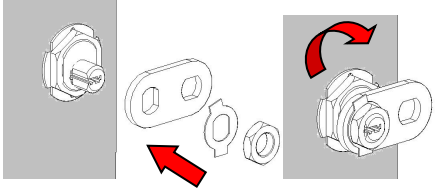
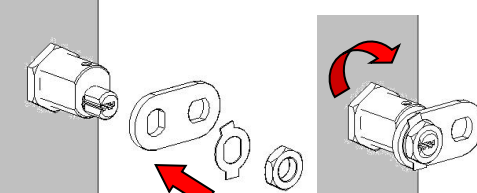




INSTRUCTIONS FOR ASSEMBLING THE CAM LOCK ON A DOOR (RIGHT DOOR)

WOODEN DOORS	METAL DOORS	
		<p>Insert the anti-rotation washer into the hole (in the wood door) at the back side.</p>
		<p>Insert the lock into the hole of the door, at the front side</p>
		<p>Fix the lock to the door, attaching the nut to the lock, at the back side.</p>
		<p>Afterwards, insert the cam, the anti-rotation washer and tighten it with the nut. Tightening torque 50 dN.m</p>
		<p>Finally, bend one of the fins of the anti-rotation washer.</p>